


TECHNICAL INFORMATION FOR

HAMMER-IN PLASTERBOARD FIXING



TECHNICAL DATA SHEET

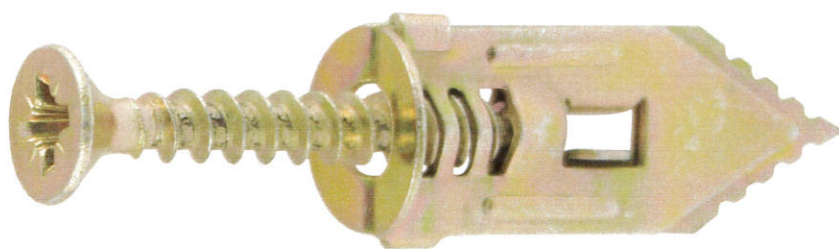

HAMMER IN FIXINGS



- Quick and easy to use, small metal hammer-in plug for light duty fixing to plasterboard.
- No drilling required. 4.0 x 30 Lugs, Access No2 screws included.



FEATURES



- Zinc plated and yellow chromated for enhanced corrosion resistance.
- Steel material offers improved fix resistance compared to plastic or nylon fixings.
- Does not rotate on screwing.
- Serrated point for easy hammering and rapid insertion.

PRODUCT RANGE

YELLOW


Product Code	Screw $\varnothing \times L$ (mm)	t_{fix} (mm)	Box Qty	Carton Qty (Box)	Carton Qty	Pallet Qty (Box)	Pallet Qty
HPF30	4.0 x 30	6	100	18	1,800	648	64,800

TECHNICAL DATA



Substrate	Plasterboard 12.5mm Thickness	
Screw Size (mm)	4.0 x 30	
Plug Size (mm)	11 x 30	
Rec. Tensile Load (kN)	0.10	
Max Rec. Load (kg)	10	


INSTALLATION GUIDELINES

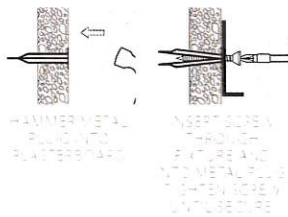

INSTALLATION DATA


Product Code	t_{fix} (mm)	DK (mm)	Screw		Plug	
			L (mm)	D (mm)	L (mm)	
HPF30	6	7.5	30	4.0	30	

*all figures stated are approximate and for reference only.

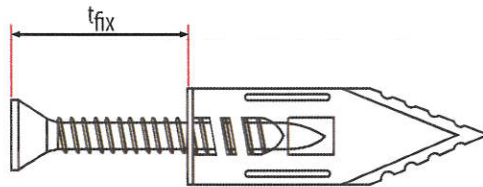

t_{fix} Maximum Fixture Thickness


SCREW

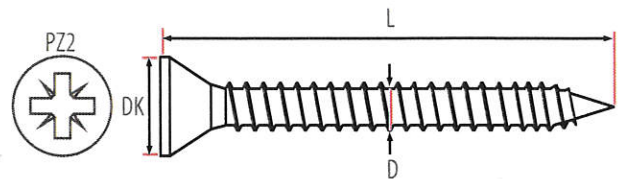

L	Screw Length
D	Screw Diameter

DK	Head Diameter
----	---------------

PLUG

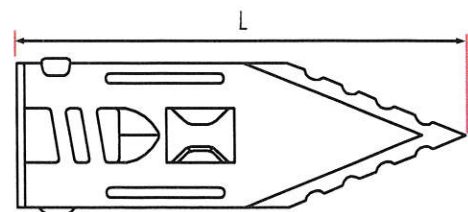

L	Plug Length
---	-------------